



# SKIOLD HAMMER MILL



SKIOLD MAKES THE DIFFERENCE!

## **SKIOLD HAMMER MILL DM6-M**

Special version for CCM maize

Capacity up to 4 t/h

Low heat generation

Less condensation

Low power consumption

Simple and reliable construction

# SKIOLD Hammer Mill

## SKIOLD Hammer Mills DM6-M


SKIOLD Hammer Mills DM6-M are ideally suited for grinding of animal feed and is intended for maize with up to 40 % moisture content. DM6-M can also be used for dry crops like the DM6-G.

DM6-M is equipped with a cleaning blade that cleans the outside of the screen.

## Wearing Parts

All wearing parts in the mill are easily replaced by original SKIOLD parts. The wearing parts are made of quality material which ensures that servicing of the mill is kept to a minimum. Constant research into prolonging the durability of the parts is carried out as well as constant surveillance of new raw materials as they become available on the market.

The simple but robust construction of the mill enables it to be accommodated into most existing systems.

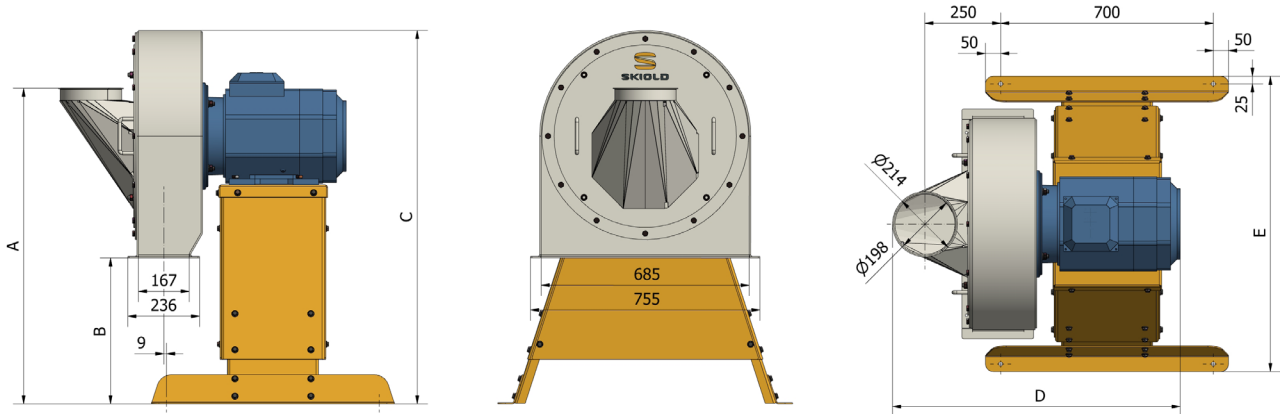

## TECHNICAL SPECIFICATIONS

Motor (kW):	11 / 15
Motor (rpm):	2800
Screen area (cm <sup>2</sup> ):	2700
Screen types:	∅ plate screen / □ inter-woven screen
Number of hammers:	28
Approx. noise level (dBA):	85
Shipping weight (kg):	255 / 265
Guiding capacity (kg/h):	500-4400

## MEASURE SKETCH

Motor	A	B	C	D	E
11 kW	1039-1310	480-750	1230-1500	982	971-1146
15 kW					

## CAPACITY

Material	∅ 4,0 mm screen	□ 4,0 mm inter-woven screen
Barley	1400-2100	1700-2700
Wheat	1800-2800	1800-2800
Oats	500-950	700-1200
Maize	2400-3600	2800-4400

Measured in storage dry and well cleaned crops, max. kg/h with motor sizes 11 - 15 kW.

The capacity varies depending on screen size, motor size, moisture contents and type of cereal.

NB! When grinding moist material the capacity will be reduced by 5 % each time the moisture contents are increased by 1 %.